


# Specifications

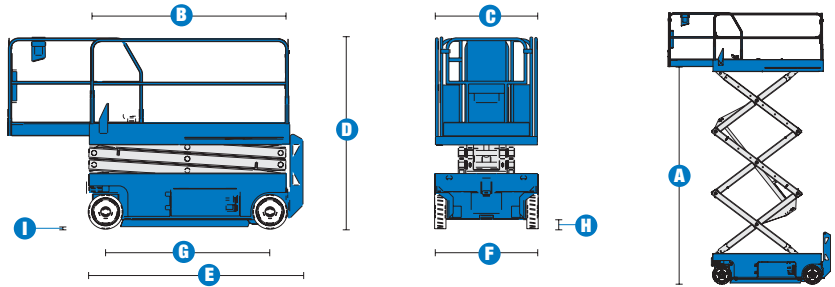

MODELS	GS™-2046		GS™-2646		GS™-3246	
MEASUREMENTS	Metric	US	Metric	US	Metric	US
Working height max*	7.9 m	26 ft	9.7 m	32 ft	11.52 m	38 ft
<b>A</b> Platform height max	6.1 m	20 ft	7.90 m	26 ft	9.7 m	32 ft
<b>B</b> Platform length - outside	226 cm	89 in	226 cm	89 in	226 cm	89 in
extended	318 cm	125 in	318 cm	125 in	318 cm	125 in
<b>C</b> Platform width - outside	115 m	45.3 in	115 cm	45.3 in	115 cm	45.3 in
Guardrail height	1.09 m	3 ft 7 in	1.09 m	3 ft 7 in	1.09 m	3 ft 7 in
Roll-out platform extension	91 cm	36 in	91 cm	36 in	91 cm	36 in
Toeboard height	15 cm	6 in	15 cm	6 in	15 cm	6 in
Height - stowed: platform	103.5 m	40.8 in	115.8 cm	45.6 in	128.3 m	50.5 in
<b>D</b> folding guardrails	213 cm	84 in	226 cm	89 in	239 cm	94 in
rails folded	155 cm	61 in	168 cm	66 in	180 cm	71 in
<b>E</b> Length - stowed	241 cm	95 in	241 cm	95 in	241 cm	95 in
extended	3.30 m	10 ft 10.5 in	3.30 m	10 ft 10.5 in	3.30 m	10 ft 10.5 in
<b>F</b> Width	117 cm	46 in	117 cm	46 in	117 cm	46 in
<b>G</b> Wheelbase	185 cm	73 in	185 cm	73 in	185 cm	73 in
<b>H</b> Ground clearance - centre	10 cm	4 in	10 cm	4 in	10 cm	4 in
<b>I</b> - with pothole guards deployed	1.9 cm	0.75 in	1.9 cm	0.75 in	19 cm	0.75 in

PRODUCTIVITY						
Lift capacity	544 kg	1,200 lbs	454 kg	1,000 lbs	318 kg	700 lbs
Drive speed - stowed	3.7 km/h	2.2 mph	3.7 km/h	2.7 mph	3.7 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability	30%/16.7°	30%/16.7°	30%/16.7°	30%/16.7°	25%/14°	25%/14°
Turning radius - inside	zero	zero	zero	zero	zero	zero
Turning radius - outside	229 cm	90 in	229 cm	90 in	229 cm	90 in
Raise / lower speed	30 / 28 sec	30 / 28 sec	30 / 24 sec	30 / 24 sec	57 / 40 sec	57 / 40 sec
Controls	proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in

POWER						
Power source	24 V (4 6V 225 Ah batteries)		24 V (4 6V 225 Ah batteries)		24 V (4 6V 225 Ah batteries)	
Hydraulic system capacity	24.6 L	6.5 gal	24.6 L	6.5 gal	26.5 L	7.0 gal

WEIGHT						
CE	1,973 kg	4,351 lbs	2,447 kg	5,395 lbs	2,812 kg	6,200 lbs

STANDARDS COMPLIANCE						
					ANSI/SIA A92.6 CSA CAN3-B354.2-M82 CE compliance option AS 1418.10	

\* Weight will vary depending on options and/or country standards

## Features

### STANDARD FEATURES

#### MEASUREMENTS

##### GS2046

- 8.1 m (26 ft) working height
- Up to 544 kg (1,200 lb) lift capacity

##### GS 2646

- 9.92 m (32 ft) working height
- Up to 454 kg (1,000lbs) lift capacity

##### GS 3264

- 11.75 m (38 ft) working height
- Up to 318 kg (700 lbs) lift height

#### PRODUCTIVITY

- 33.46 cm (36 in) roll-out platform extension
- Proportional controls for lift and drive functions
- AC wiring to platform
- Multiple disc brakes provide smooth deceleration
- Manual platform lowering valve
- Tilt sensor with an audible alarm
- Lift points
- Emergency stop switches at both platform and ground controls
- Automatic 25 amp battery charger
- Manual brake release
- Non-marking tyres
- Hour meter
- Platform swing gate
- Dual flashing beacons (standard)

#### POWER

- 24V (4 6V 225AH batteries) (all models)



### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Automotive horn
- Motion alarm
- Air line to platform
- Maintenance-free batteries
- Platform work lights

### Genie Australia

591 Boundary Road, Darra, Qld 4076  
PO Box 394, Richlands, Qld 4077  
Tel: + 61 7 3375 1660  
Toll Free In Australia: 1800 331 660  
Fax: + 61 7 3375 1002

### European Offices

#### UK

The Maltings  
Wharf Road  
Grantham NG31 6BH  
UK  
Tel: +44 (0)1476 584333  
Fax: +44 (0)1476 584334

#### France

10, ZA de la Croix St. Mathieu  
28320 Gallardon  
France  
Tel: +33 (0)2 37 26 09 99  
Fax: +33 (0)2 37 26 09 98

#### Germany

Finienweg 3  
28832 Achim/Bremen  
Germany  
Tel: +49 (0)4202 8852-0  
Fax: +49 (0)4202 8852-25

#### Spain

Gai' a 31, Pol. Ind. Pl' a d'en Coll  
08110 Montcada i Reixac  
Barcelona  
Spain  
Tel: +34 93 572 50 90  
Fax: +34 93 572 50 91

#### Scandinavia

Tagenevägen 72  
425 37 Hisings Kärra  
Sweden  
Tel: +46 31 57 51 00  
Fax: +46 31 57 90 20

### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
USA  
Tel: +1 425 881-1800  
Fax: +1 425 883-3475

**WEB:** [www.genieindustries.com](http://www.genieindustries.com)

### Distributed By: